


MA171P

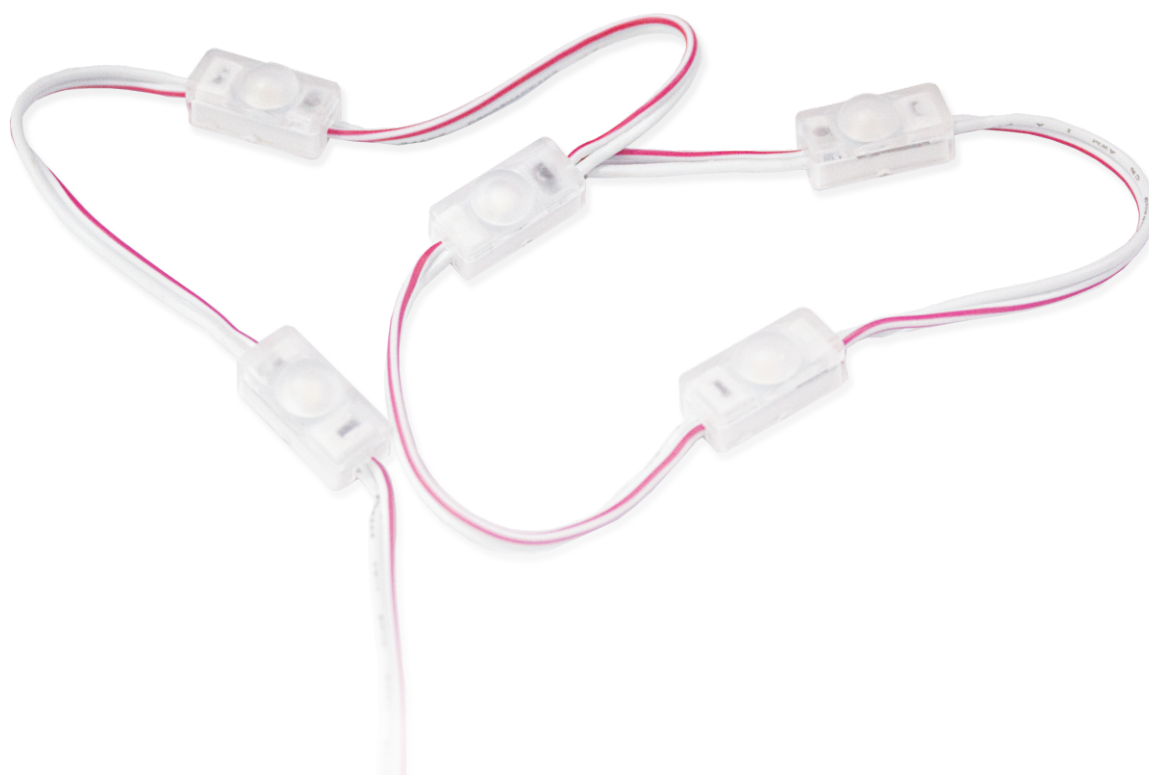

Characteristics

SMD 2835 , IP65

Wider beam angle for 140°

UL/FCC/CE/RoHS approved

Integrated lens


Suitable for small letters with very different shapes

Constant Current , 5 years warranty


Parameter

Dimension	17*8*5.7 / 0.67*0.31*0.22"
Power (w)	0.3±10%
Driving mode	Constant Current
CCT (k)	3000/6500/15000
Luminous Flux (lm)	30/32/33
Efficiency (lm/w)	100/105/110
Concatenation (pcs)	20
Module/ft(modules)	3.3
Lumen/ft(lm)	109
Watts/ft(w)	1
60W Power Supply Load(modules)	170
Working temp (°)	-20~+45
Storage temp (°)	-30~+60

Profile Drawings

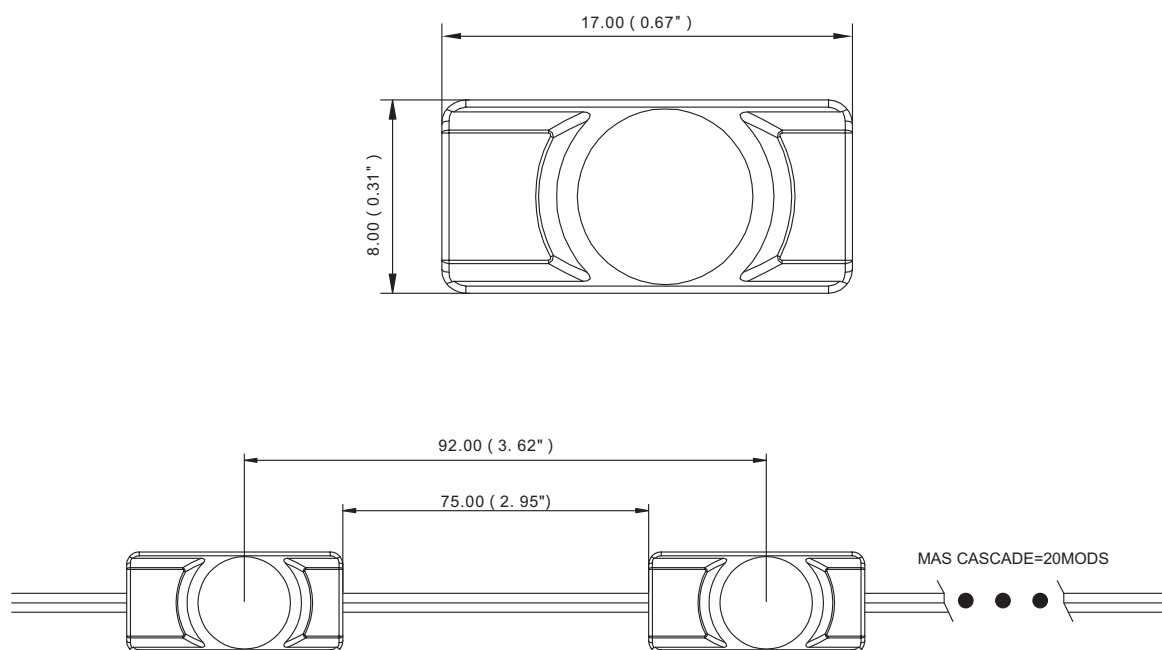


Package

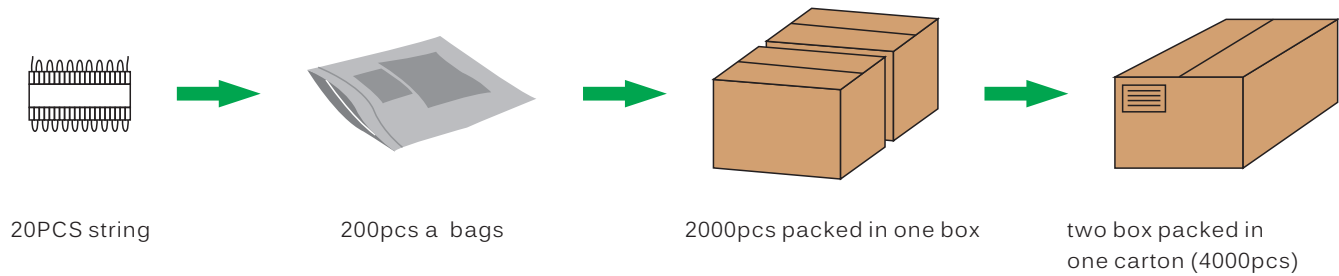

Size(mm)	Gross Weight (KG)	Net Weight (KG)
530*375*275	10.5	7.2

Installation

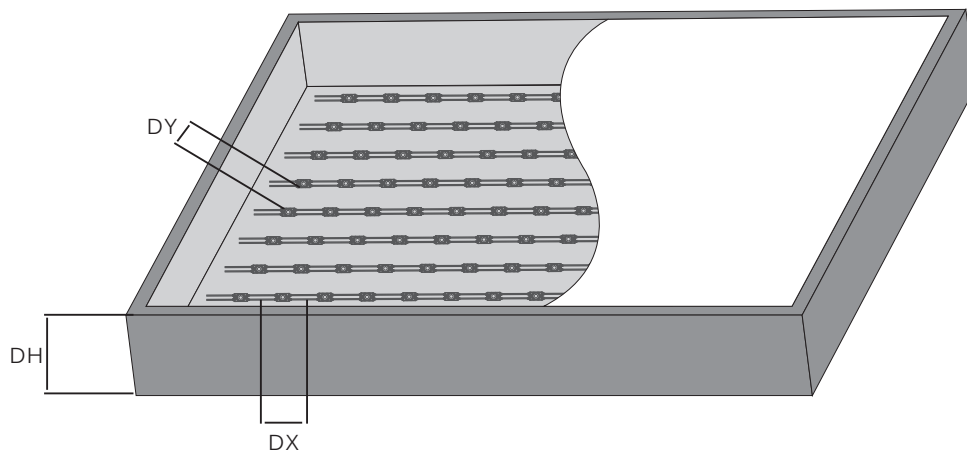

Light box thickness DH(mm)	Module horizontal distance DX(mm)	Module vertical distance DY(mm)	Modules average in 1m ² (pcs/m ²)	Surface illumination (lux)
40~60	30	30	1200	15000